RUBBERSELECT.

Flexible solutions product catalog

About RubberSelect

RubberSelect B.V. has been your preferred partner for all industrial rubber solutions since 2010. Together with our affiliated company Zenith Rubber Europe we offer rubber solutions for a wide range of applications. Our experience, network and state-of-the-art logistics facilities can provide you with any rubber product you may need.


- Full range rubber products
- State-of-the-art equipment and experienced staff
- Large available stock in our central warehouse
- Custom-made cutting solutions

T +31 (0)88 61 89 340
info@rubberselect.com
www.rubberselect.com


All rights reserved. Text and images are property of Rubberselect. It is forbidden to even partially reproduce the catalog. In the constant search for technical and functional improvements, Rubberselect, reserves the right to make changes to its products without notice.



A SBR
5 - 10

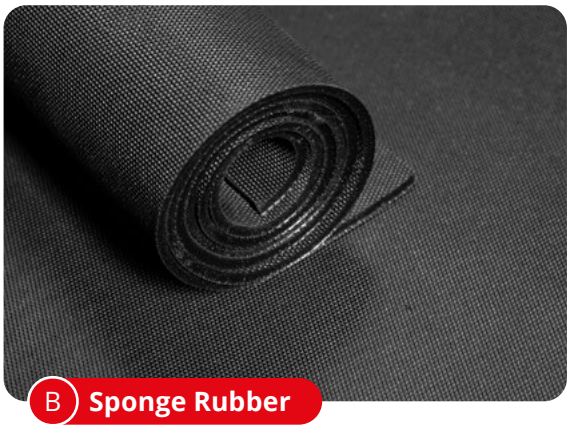

B Sponge Rubber
13 - 15

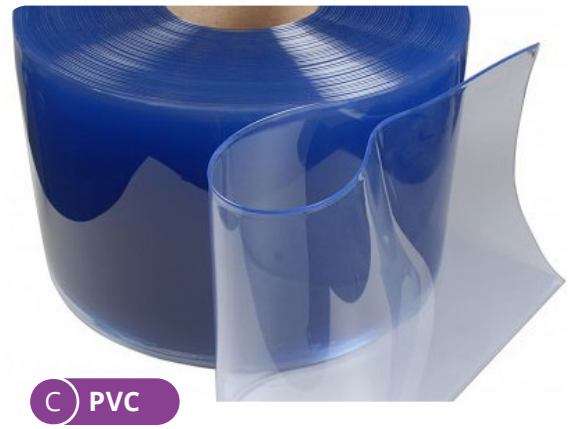

C PVC
17 - 21



D PU
23 - 29




E Granulate
31 - 35



F Matting
37 - 54



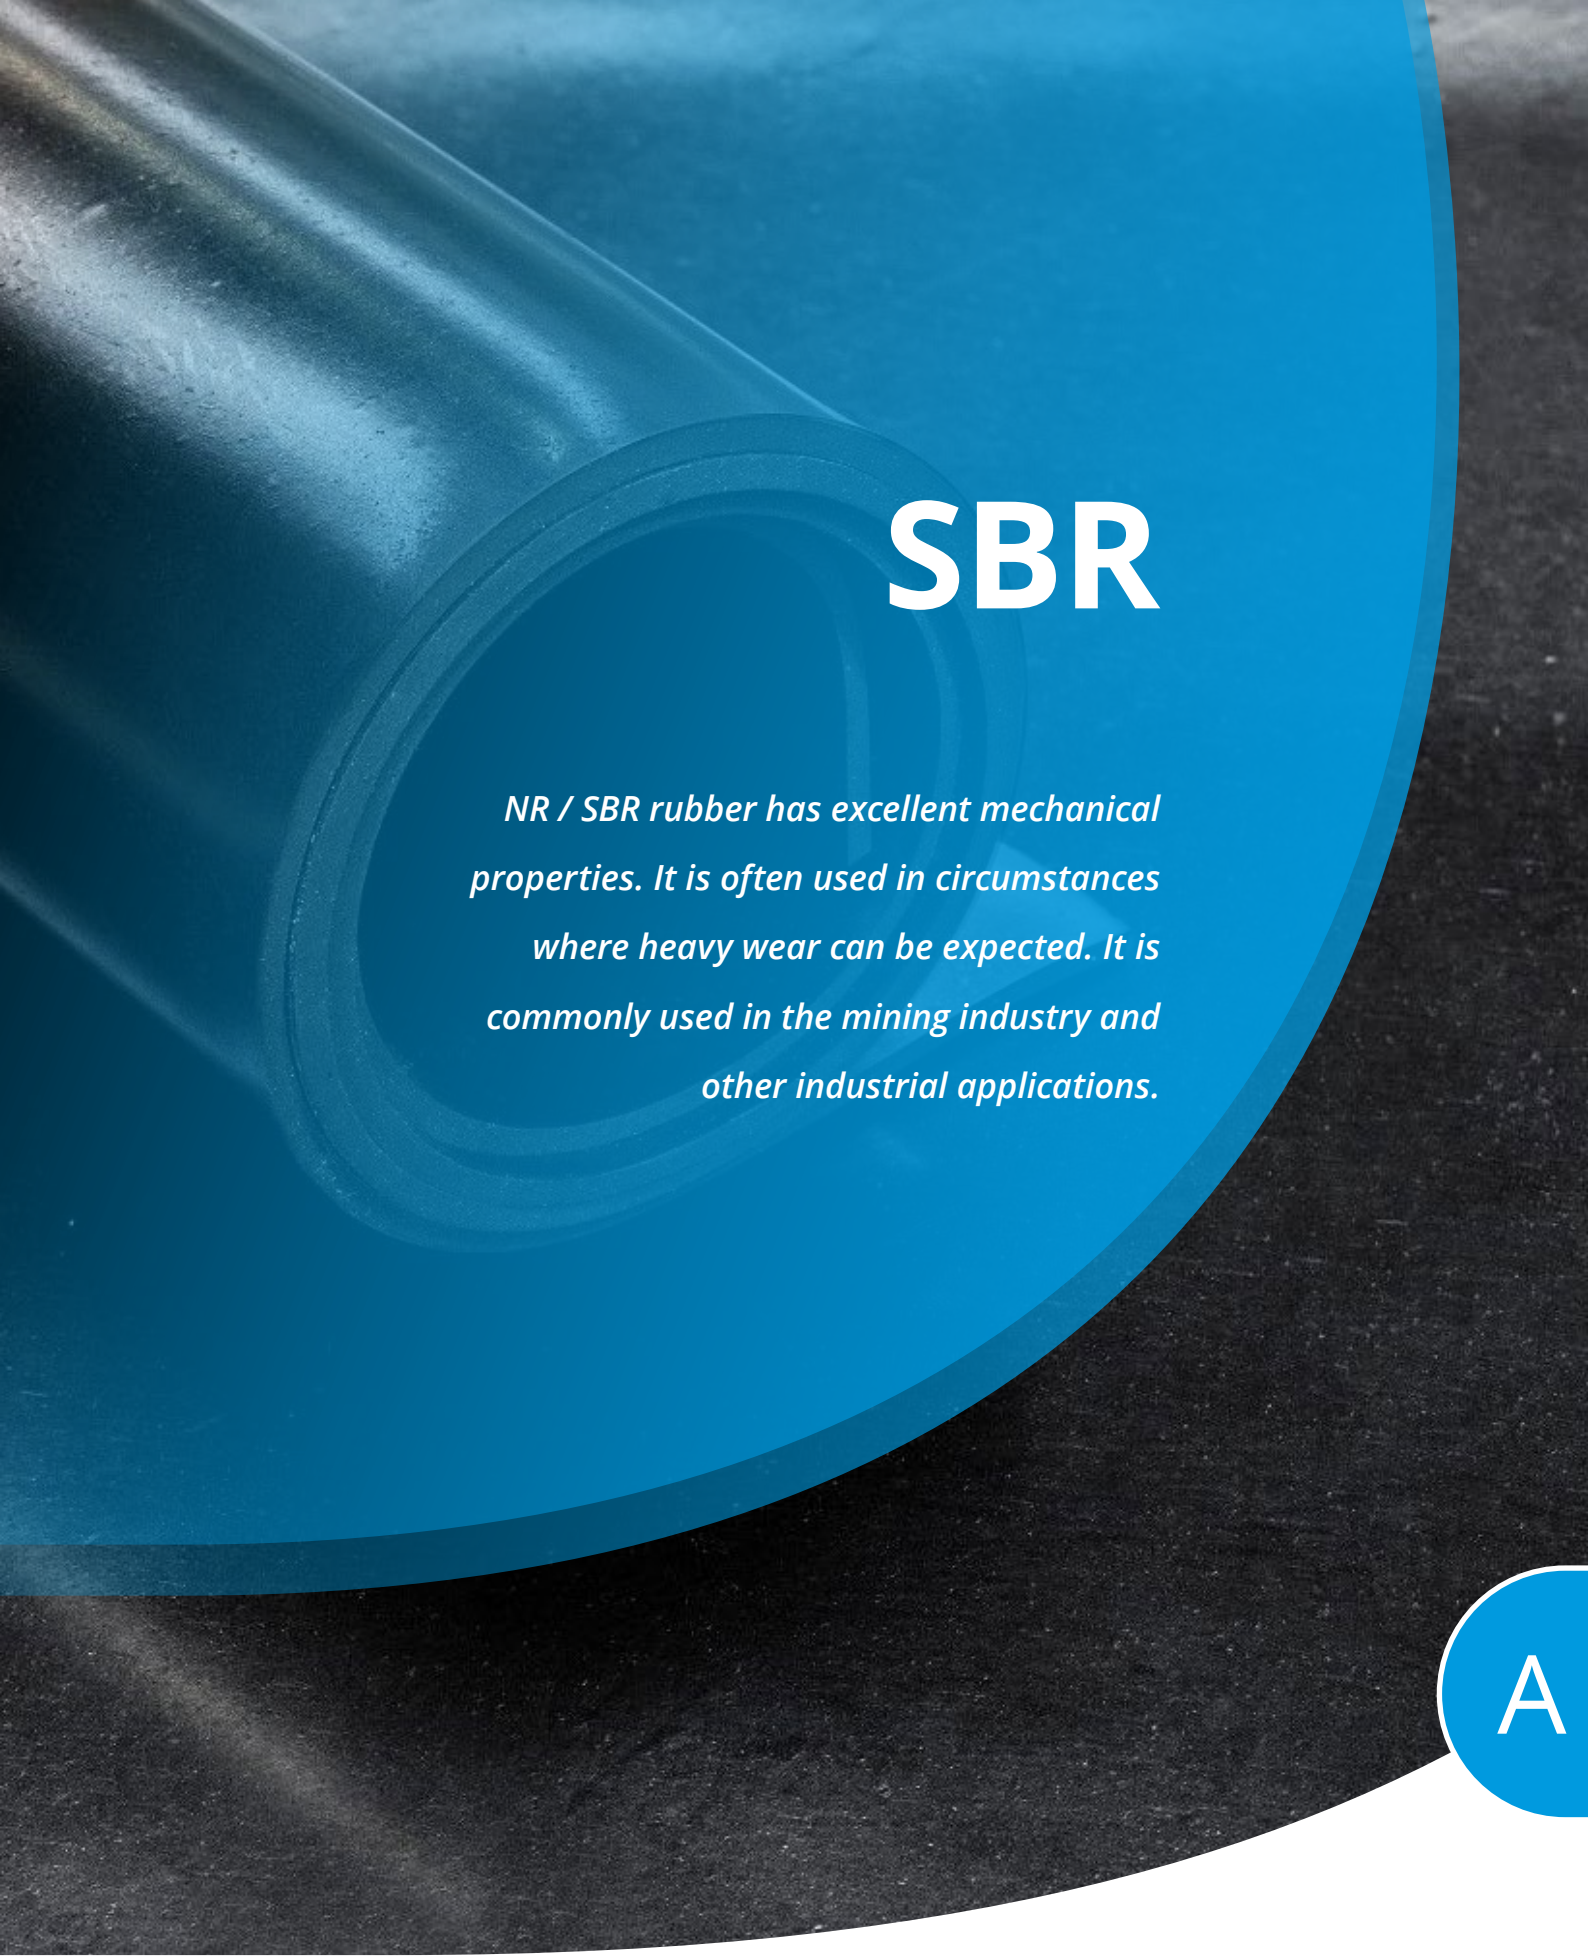

SBR

NR / SBR rubber has excellent mechanical properties. It is often used in circumstances where heavy wear can be expected. It is commonly used in the mining industry and other industrial applications.

A



SBR Rubber Sheet

Allpac

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%

Features Widely used industrial rubber quality with good mechanical properties, abrasion and shock resistance.

Application General purpose gaskets, shock absorbers, conveyor belts, insulation et cetera.

Thickness (mm)	Insertion(s) (no.)	Width (mm)	Length (mm)	Article code
1	0	1.200	10.000	SBR 1/0
1	0	1.200	20.000	SBR 1/0
1	0	1.400	10.000	SBR 1/0
1	0	1.400	20.000	SBR 1/0
1,5	0	1.200	10.000	SBR 1,5/0
1,5	0	1.400	10.000	SBR 1,5/0
1,5	0	1.400	15.000	SBR 1,5/0
2	0	1.200	10.000	SBR 2/0
2	0	1.400	10.000	SBR 2/0
2	0	1.400	20.000	SBR 2/0
3	0	1.200	10.000	SBR 3/0
3	0	1.400	10.000	SBR 3/0
3	0	1.400	20.000	SBR 3/0
4	0	1.200	10.000	SBR 4/0
4	0	1.400	10.000	SBR 4/0
5	0	1.200	10.000	SBR 5/0
5	0	1.400	10.000	SBR 5/0
6	0	1.200	10.000	SBR 6/0
6	0	1.400	10.000	SBR 6/0
8	0	1.200	5.000	SBR 8/0
8	0	1.200	10.000	SBR 8/0
8	0	1.400	5.000	SBR 8/0
8	0	1.400	10.000	SBR 8/0

A

(more sizes on the next page)



SBR Rubber Sheet

Allpac

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%

Features Widely used industrial rubber quality with good mechanical properties, abrasion and shock resistance.

Application General purpose gaskets, shock absorbers, conveyor belts, insulation et cetera.

Thickness (mm)	Insertion(s) (no.)	Width (mm)	Length (mm)	Article code
10	0	1.200	5.000	SBR 10/0
10	0	1.200	10.000	SBR 10/0
10	0	1.400	5.000	SBR 10/0
10	0	1.400	10.000	SBR 10/0
12	0	1.200	10.000	SBR 12/0
12	0	1.400	5.000	SBR 12/0
12	0	1.400	10.000	SBR 12/0
15	0	1.200	10.000	SBR 15/0
15	0	1.400	5.000	SBR 15/0
15	0	1.400	10.000	SBR 15/0
20	0	1.200	10.000	SBR 20/0
20	0	1.400	5.000	SBR 20/0
20	0	1.400	10.000	SBR 20/0
25	0	1.400	5.000	SBR 25/0
25	0	1.400	10.000	SBR 25/0
30	0	1.400	5.000	SBR 30/0
30	0	1.400	10.000	SBR 30/0



SBR Rubber Sheet

Allpac with insertion(s)

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%

Features Widely used industrial rubber quality with good mechanical properties, abrasion and shock resistance.

Application General purpose gaskets, shock absorbers, conveyor belts, insulation et cetera.

Thickness (mm)	Insertion(s) (no.)	Width (mm)	Length (mm)	Article code
2	1	1.200	10.000	SBR 2/1
2	1	1.400	10.000	SBR 2/1
3	1	1.200	10.000	SBR 3/1
3	1	1.400	10.000	SBR 3/1
3	2	1.200	10.000	SBR 3/2
3	2	1.400	10.000	SBR 3/2
4	1	1.200	10.000	SBR 4/1
4	1	1.400	10.000	SBR 4/1
4	2	1.200	10.000	SBR 4/2
4	2	1.400	10.000	SBR 4/2
5	1	1.200	10.000	SBR 5/1
5	1	1.400	10.000	SBR 5/1
5	2	1.200	10.000	SBR 5/2
5	2	1.400	10.000	SBR 5/2
6	1	1.200	10.000	SBR 6/1
6	1	1.400	10.000	SBR 6/1
6	2	1.200	10.000	SBR 6/2
6	2	1.400	10.000	SBR 6/2
8	2	1.200	10.000	SBR 8/2
8	2	1.400	5.000	SBR 8/2
8	2	1.400	10.000	SBR 8/2
10	2	1.400	5.000	SBR 10/2
10	2	1.400	10.000	SBR 10/2

A



SBR Rubber Sheet

Allpac flat sheets

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%

Features Widely used industrial rubber quality with good mechanical properties, abrasion and shock resistance.

Application General purpose gaskets, shock absorbers, conveyor belts, insulation et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
10	1.000	1.000	SBR 10/0-1x1
15	1.000	1.000	SBR 15/0-1x1
20	1.000	1.000	SBR 20/0-1x1
20	1.400	2.000	SBR 20/0
25	1.000	1.000	SBR 25/0-1x1
30	1.000	1.000	SBR 30/0-1x1
30	1.400	2.000	SBR 30/0
40	1.000	1.000	SBR 40/0-1x1
40	1.400	2.000	SBR 40/0
50	1.000	1.000	SBR 50/0-1x1
50	1.400	2.000	SBR 50/0
60	1.000	1.000	SBR 60/0-1x1
80	1.000	1.000	SBR 80/0-1x1
100	1.000	1.000	SBR 100/0-1x1



Sponge Rubber

EPDM Sponge Rubber is very flexible and is air and watertight because of its skin. The closed cell structure enables the material to handle high pressure sealing applications. Suitable for outdoor sealing application due to UV and ozone resistance.

B



Sponge Rubber

EPDM Sponge Rubber

Quality	SBR/EPDM
Colour	Black
Temperature range	-35° to +120°C
Specific gravity	0,6 g/cm³
Hardness	25 Shore A +/- 5
Tensile strength	1 MPa
Elongation at break	300%

Features Air and watertight structure, good flexibility, tensile strength and recovery properties. The closed cell structure enables the material to handle high-pressure sealing applications. Suitable for outdoor sealing applications due to UV and ozone resistance.

Application Construction industries, product packaging and protection, air and watertight seals.

Thickness (mm)	Width (mm)	Length (mm)	Article code
2	1.200	10.000	EM 2/0
3	1.200	10.000	EM 3/0
4	1.200	10.000	EM 4/0
5	1.200	10.000	EM 5/0
6	1.200	10.000	EM 6/0
8	1.200	10.000	EM 8/0
10	1.200	10.000	EM 10/0
12	1.200	2.000	EM 12/0
15	1.200	2.000	EM 15/0
20	1.200	2.000	EM 20/0

B





PVC

PVC has great flexibilty and good temperature resistance. It is often used as protection of machinery, partitions, doors foor cold stores and so on.

C



PVC

PVC Strips

Quality	PVC
Colour	Blue Transparent
Temperature range	-20° to +50°C
Specific gravity	1,22 g/cm³
Hardness	75 Shore A +/- 5
Tensile strength	17 MPa
Elongation at break	360%
Features	Flexibility, good temperature resistance at both high and low temperatures, resistant to ultraviolet, ozone and weather influences.
Application	Protection of machinery, partitions, doors for cold stores, et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
2	200	50.000	PVC 2x200
2	300	50.000	PVC 2x300
3	200	50.000	PVC 3x200
3	300	50.000	PVC 3x300
3	400	50.000	PVC 3x400
4	300	50.000	PVC 4x300
4	400	50.000	PVC 4x400

C



PVC

PVC Sheeting

Quality	PVC
Colour	Blue Transparent
Temperature range	-20° to +50°C
Specific gravity	1,22 g/cm³
Hardness	75 Shore A +/- 5
Tensile strength	17 MPa
Elongation at break	360%

Features	Flexibility, good temperature resistance at both high and low temperatures, resistant to ultraviolet, ozone and weather influences.
Application	Protection of machinery, partitions, doors for cold stores, et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
2	1.000	20.000	PVC 2x1000
2	1.200	20.000	PVC 2x1200
2	1.500	20.000	PVC 2x1500
3	1.000	20.000	PVC 3x1000
3	1.200	20.000	PVC 3x1200
3	1.500	20.000	PVC 3x1500
4	1.000	20.000	PVC 4x1000
4	1.200	20.000	PVC 4x1200
4	1.500	20.000	PVC 4x1500
5	1.000	20.000	PVC 5x1000
5	1.200	20.000	PVC 5x1200
5	1.500	20.000	PVC 5x1500
7	1.000	10.000	PVC 7x1000
7	1.500	10.000	PVC 7x1500



PVC

Suspension rail

Suspension rail Stainless steel profile with suspension hooks, ideal for mounting in or in front of a dooropening.

Length (mm)	Article code
1.000	PVCRAIL



PVC

Hanging set

Suspension rail Set of stainless steel plates for mounting with rivets or bolts (not included).

Width (mm)	Article code
200	PVCKLEM 200
300	PVCKLEM 300
400	PVCKLEM 400

C



PU

PU Rubber has great mechanical characteristics. It is often used in circumstances where great wear resistance is needed. It also has resistance to oils, certain solvents, greases, ozone, sunlight and weather.

D



PU

PU 70 Shore

Quality	PU
Colour	Ochreous
Temperature range	-40° to +75°C
Specific gravity	1,13 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	25 MPa
Elongation at break	500%

Features Polyether-based PU with good abrasion resistance, very high tensile strength, tear strength and load bearing capabilities. It has resistance to oils, certain solvents, greases, ozone, sunlight and weather.

Application Heavy wear applications. scrapers, gaskets, selaing strips et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
1	1.000	2.000	PU70 1/0
1	1.000	4.000	PU70 1/0
1,5	1.000	2.000	PU70 1,5/0
1,5	1.000	4.000	PU70 1,5/0
2	1.000	2.000	PU70 2/0
2	1.000	4.000	PU70 2/0
3	1.000	2.000	PU70 3/0
3	1.000	2.000	PU70 3/0
4	1.000	2.000	PU70 4/0
4	1.000	4.000	PU70 4/0
5	1.000	2.000	PU70 5/0
5	1.000	4.000	PU70 5/0
6	1.000	2.000	PU70 6/0
6	1.000	4.000	PU70 6/0
8	1.000	2.000	PU70 8/0
8	1.000	4.000	PU70 8/0
10	1.000	2.000	PU70 10/0
10	1.000	4.000	PU70 10/0
12	1.000	2.000	PU70 12/0
12	1.000	4.000	PU70 12/0
15	1.000	2.000	PU70 15/0
15	1.000	4.000	PU70 15/0
20	1.000	2.000	PU70 20/0
20	1.000	4.000	PU70 20/0
25	1.000	2.000	PU70 25/0
30	1.000	2.000	PU70 30/0
40	1.000	2.000	PU70 40/0



PU

PU 80 Shore

Quality	PU
Colour	Ochreous
Temperature range	-40° to +75°C
Specific gravity	1,13 g/cm³
Hardness	80 Shore A +/- 5
Tensile strength	25 MPa
Elongation at break	500%

Features Polyether-based PU with good abrasion resistance, very high tensile strength, tear strength and load bearing capabilities. It has resistance to oils, certain solvents, greases, ozone, sunlight and weather.

Application Heavy wear applications, scrapers, gaskets, sealing strips etc.

Thickness (mm)	Width (mm)	Length (mm)	Article code
1	1.000	2.000	PU80 1/0
1	1.000	4.000	PU80 1/0
1,5	1.000	2.000	PU80 1,5/0
1,5	1.000	4.000	PU80 1,5/0
2	1.000	2.000	PU80 2/0
2	1.000	4.000	PU80 2/0
3	1.000	2.000	PU80 3/0
3	1.000	2.000	PU80 3/0
4	1.000	2.000	PU80 4/0
4	1.000	4.000	PU80 4/0
5	1.000	2.000	PU80 5/0
5	1.000	4.000	PU80 5/0
6	1.000	2.000	PU80 6/0
6	1.000	4.000	PU80 6/0
8	1.000	2.000	PU80 8/0
8	1.000	4.000	PU80 8/0
10	1.000	2.000	PU80 10/0
10	1.000	4.000	PU80 10/0
12	1.000	2.000	PU80 12/0
12	1.000	4.000	PU80 12/0
15	1.000	2.000	PU80 15/0
15	1.000	4.000	PU80 15/0
20	1.000	2.000	PU80 20/0
20	1.000	4.000	PU80 20/0
25	1.000	2.000	PU80 25/0
30	1.000	2.000	PU80 30/0



PU

PU 90 Shore

Quality	PU
Colour	Ochreous
Temperature range	-40° to +75°C
Specific gravity	1,13 g/cm³
Hardness	90 Shore A +/- 5
Tensile strength	29 MPa
Elongation at break	450%

Features Polyether-based PU with good abrasion resistance, very high tensile strength, tear strength and load bearing capabilities. It has resistance to oils, certain solvents, greases, ozone, sunlight and weather.

Application Heavy wear applications, scrapers, gaskets, sealing strips etc.

Thickness (mm)	Width (mm)	Length (mm)	Article code
1	1.000	2.000	PU90 1/0
1	1.000	4.000	PU90 1/0
1,5	1.000	2.000	PU90 1,5/0
1,5	1.000	4.000	PU90 1,5/0
2	1.000	2.000	PU90 2/0
2	1.000	4.000	PU90 2/0
3	1.000	2.000	PU90 3/0
3	1.000	2.000	PU90 3/0
4	1.000	2.000	PU90 4/0
4	1.000	4.000	PU90 4/0
5	1.000	2.000	PU90 5/0
5	1.000	4.000	PU90 5/0
6	1.000	2.000	PU90 6/0
6	1.000	4.000	PU90 6/0
8	1.000	2.000	PU90 8/0
8	1.000	4.000	PU90 8/0
10	1.000	2.000	PU90 10/0
10	1.000	4.000	PU90 10/0
12	1.000	2.000	PU90 12/0
12	1.000	4.000	PU90 12/0
15	1.000	2.000	PU90 15/0
15	1.000	4.000	PU90 15/0
20	1.000	2.000	PU90 20/0
20	1.000	4.000	PU90 20/0
25	1.000	2.000	PU90 25/0
30	1.000	2.000	PU90 30/0
40	1.000	2.000	PU90 40/0
50	1.000	2.000	PU90 50/0



Premium PU

PU 90 Shore

Quality	PU
Colour	Brown
Temperature range	-40° to +75°C
Specific gravity	1,27 g/cm³
Hardness	90 Shore A +/- 5
Tensile strength	48 MPa
Elongation at break	610%
Abrasion	30-40 mm³
Features	Polyester-based PU with excellent abrasion resistance, very high tensile strength, tear strength and load bearing capabilities. It has resistance to oils, certain solvents, greases, ozone, sunlight and weather.
Application	Heavy wear applications, scrapers, gaskets, sealing strips etc.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.000	2.000	PPU90 3/0
3	1.000	4.000	PPU90 3/0
6	1.000	2.000	PPU90 6/0
6	1.000	4.000	PPU90 6/0
10	1.000	2.000	PPU90 10/0
10	1.000	4.000	PPU90 10/0



High wear resistant PU

PU 63 Shore

Quality	PU
Colour	Red
Temperature range	-40° to +75°C
Specific gravity	1,27 g/cm³
Hardness	63 Shore A +/- 5
Tensile strength	45 MPa
Elongation at break	600%
Abrasion	45 mm³

Features Polyester-based PU with excellent abrasion resistance and other mechanical properties, Very flexible due to its low hardness. Available in an ideal format of 10-meter roll.

Application Heavy wear applications. scrapers, gaskets, sealing strips et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
6	1.400	10.000	PUR63 6/0
8	1.400	10.000	PUR63 8/0
10	1.400	10.000	PUR63 10/0

D


SPORTS FLOORING PURE BLACK
SFB 8/0-1.25
8MM X 1.25 X 10



Granulate

Granulate rubber is resistant to UV, ozone and high pressure. It also has very good impact sound insulation and is therefore perfect for applications to protect roofs and floorings.

E



Granulate

Protection Mat Standard


Quality	PU bonded recycled SBR rubber
Colour	Black granulates interpersed with colors
Temperature range	-30° to +80°C
Specific gravity	730 kg/m³
Tensile strength	> 0,4 MPa
Elongation at break	44%

Features Suitable for outdoor sealing applications due to UV and Ozone resistance, high compression resistance and impact strength, rotproof, anti-slip and it has very good impact sound insulation. Made from high quality recycled rubber with EU origin.

Application To protect surfaces like roofs and flooring.

Thickness (mm)	Width (mm)	Length (mm)	Article code
5	1.250	10.000	PM730 5/0
6	1.250	10.000	PM730 6/0
8	1.250	10.000	PM730 8/0
10	1.250	10.000	PM730 10/0
15	1.250	10.000	PM730 15/0
20	1.250	10.000	PM730 20/0

E

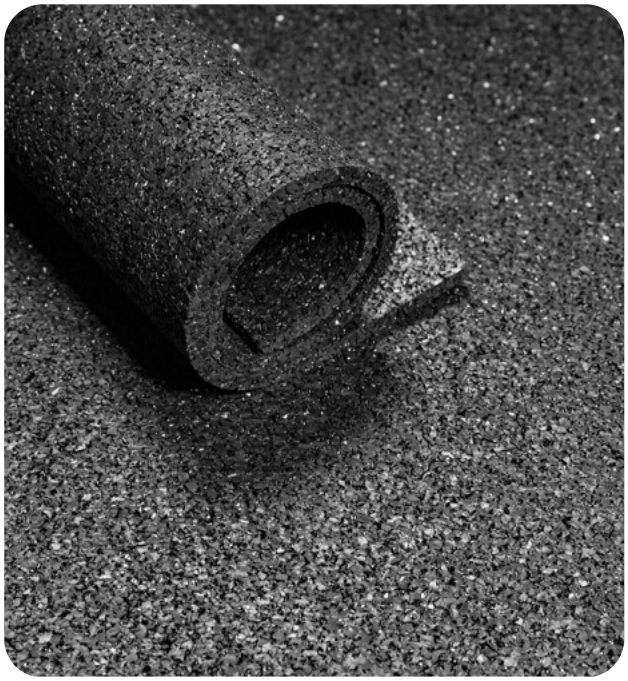

Granulate


Protection Mat Strong

Quality	PU bonded recycled SBR rubber
Colour	Black
Temperature range	-30° to +80°C
Specific gravity	850 kg/m³
Tensile strength	> 0,8 MPa
Elongation at break	67%

Features Suitable for outdoor sealing applications due to UV and Ozone resistance, high compression resistance and impact strength, rotproof, anti-slip and has very good impact sound insulation. Made from high quality recycled rubber with EU origin.

Application To protect surfaces like roofs and flooring, underflooring for rubber sport flooring.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.250	10.000	PM850 3/0
4	1.250	10.000	PM850 4/0
5	1.250	10.000	PM850 5/0
6	1.250	10.000	PM850 6/0
8	1.250	10.000	PM850 8/0
10	1.250	10.000	PM850 10/0

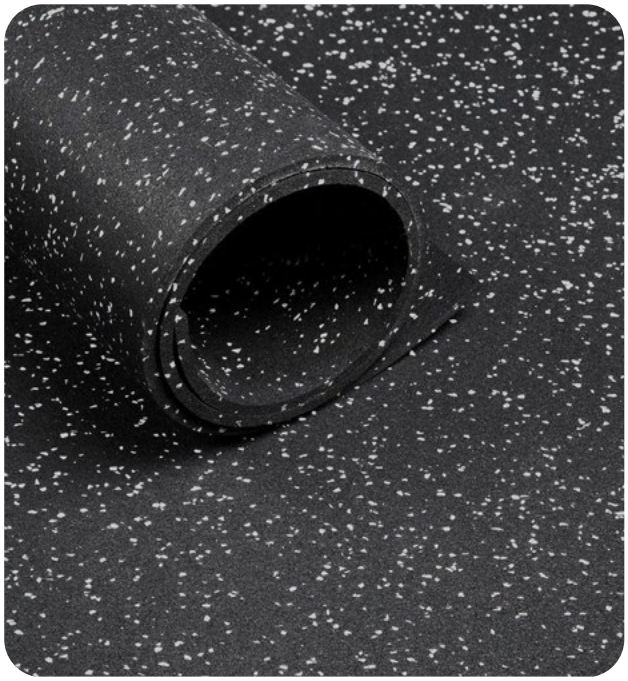

Granulate

Sportsflooring

Quality	PU bonded recycled EPDM/SBR rubber
Temperature range	-30° to +80°C
Specific gravity	980 kg/m³
Tensile strength	> 1,8 MPa
Elongation at break	98%
Features	Suitable for outdoor sealing applications due to UV and Ozone resistance, high compression resistance and impact strength, rotproof and has very good impact sound insulation.
Application	Flooring for gyms, crafting rooms, swimming pools, exhibition halls et cetera.

Thickness (mm)	Colour	Width (mm)	Length (mm)	Article code
6	Black	1.250	10.000	SFB 6/0
6	Black with blue dots	1.250	10.000	SF 6/0
6	Black with grey dots	1.250	10.000	SF 6/0
8	Black	1.250	10.000	SFB 8/0
8	Black with blue dots	1.250	10.000	SF 8/0
8	Black with grey dots	1.250	10.000	SF 8/0

Other sizes and colours on request

E


ALLPAC
SBR 3/0
3mm X 1.4 X 10
ALLPAC
SBR 3/0
3mm X 1.4 X 10



Matting

We provide a variety of Anti-Skid Mats for multipurpose use. Our mats are excellent in shock absorption and slip resistance as well as providing improved walking comforts. Flooring mats with anti-skid ridges prevent slips & falls and come with a protective, non-stick finish to make cleaning quick and easy.

F



Rubber Matting

Fine Rib design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Insertion(s) (no.)	Width (mm)	Length (mm)	Article code
3	0	1.000	10.000	FR 3/0
3	0	1.200	10.000	FR 3/0
3	0	1.800	10.000	FR 3/0-1,8
3	0	2.000	10.000	FR 3/0-2
3	1	1.200	10.000	FR 3/1




Rubber Matting

Combi Rib design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose. areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.200	10.000	COMR 3/0
3	1.400	10.000	COMR 3/0
3	1.500	10.000	COMR 3/0

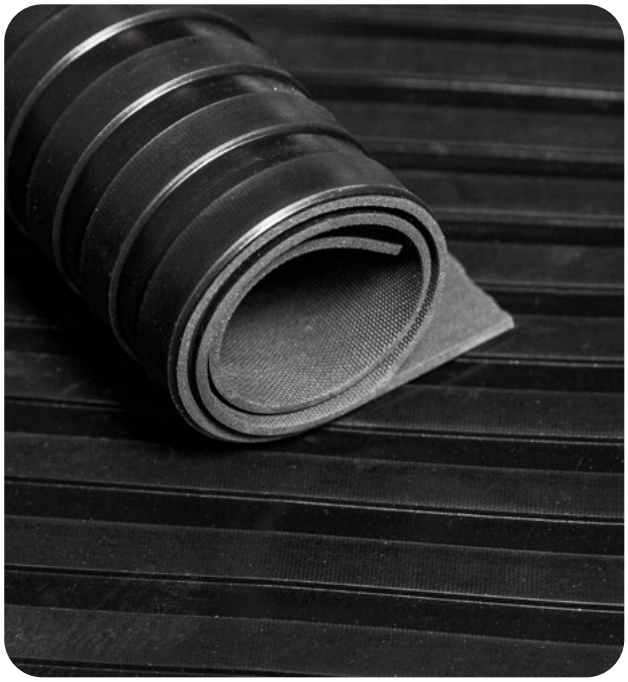

Rubber Matting

Broad Rib design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.000	10.000	MR 3/0
3	1.200	10.000	MR 3/0



Rubber Matting

Wide Rib design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Anti-slip wide ribbed surface on one side and a fine cloth impression pattern on the other side.
Application	Loose lay applications for floors, walkways, runners, airports, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
6	1.000	10.000	WR 6/0
6	1.000	5.000	WR 6/0
6	1.200	10.000	WR 6/0




Rubber Matting

Fishbone design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Fishbone pattern ribbed surface on one side and a fine cloth impression pattern on the other side.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.000	10.000	FM 3/0
3	1.200	10.000	FM 3/0

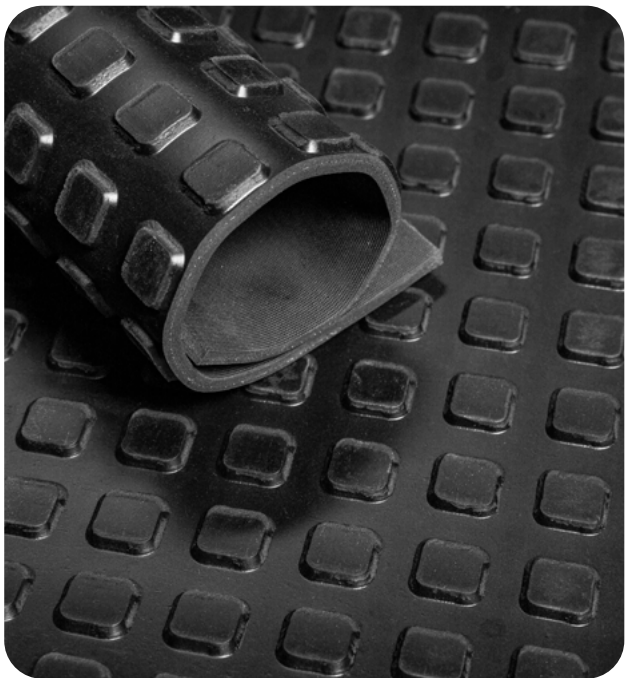

Rubber Matting

Square Stud design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Raised square design surface on one side and a fine cloth impression pattern on the other side with one cotton insertion.
Application	Heavy duty application such as horsetrailers, machines, stables, et cetera.

Thickness (mm)	Insertion(s) (no.)	Width (mm)	Length (mm)	Article code
8	1	1.000	10.000	KM 8/1
8	1	1.200	10.000	KM 8/1



Rubber Matting

Stud design

Quality	NR/SBR
Colour	Black
Stud diameter	25 mm
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%

Features Raised circular design surface on one side and a fine cloth impression pattern on the other side.

Application Indoor application such as airports, hotels, cabins, exhibitions et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.000	10.000	SM 3/0
3	1.200	10.000	SM 3/0
3	1.400	10.000	SM 3/0
3	1.500	10.000	SM 3/0
3	2.000	10.000	SM 3/0-2
3	400	10.000	SM 3/0-0,4
3	500	10.000	SM 3/0-0,5
3	600	10.000	SM 3/0-0,6
3	700	10.000	SM 3/0-0,7
3	800	10.000	SM 3/0-0,8
4	1.200	10.000	SM 4/0



Rubber Matting

Stud design IN45

Quality	NR/SBR
Colour	Black
Stud diameter	20 mm
Temperature range	-20° to +90°C
Specific gravity	1,5 g/cm³
Hardness	80 Shore A +/- 5
Tensile strength	7,5 MPa
Elongation at break	250%
Features	Raised circular design surface on one side and a fine cloth impression pattern on the other side.
Application	Indoor application such as airports, hotels, cabins, exhibitions et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
4,5	1.000	10.000	IN45 4,5/0



Rubber Matting

Stud design 4012

Quality	NR/SBR
Stud diameter	12 mm
Temperature range	-20° to +90°C
Specific gravity	1,5 g/cm³
Hardness	80 Shore A +/- 5
Tensile strength	7,5 MPa
Elongation at break	250%
Features	Raised circular design surface on one side and a fine cloth impression pattern on the other side.
Application	Indoor application such as airports, hotels, cabins, exhibitions et cetera.

F

Thickness (mm)	Colour	Width (mm)	Length (mm)	Article code
4	Black	1.500	10.000	4012 4/0
4	Grey	1.500	10.000	4012G 4/0




Rubber Matting

Stud design Nobra

Quality	NR/SBR
Colour	Black
Stud diameter	28 mm
Temperature range	-20° to +90°C
Specific gravity	1,5 g/cm³
Hardness	80 Shore A +/- 5
Tensile strength	7,5 MPa
Elongation at break	250%
Features	Raised circular design surface on one side and a fine cloth impression pattern on the other side.
Application	Indoor application such as airports, hotels, cabins, exhibitions et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
4	1.450	10.000	NOBRA 4/0

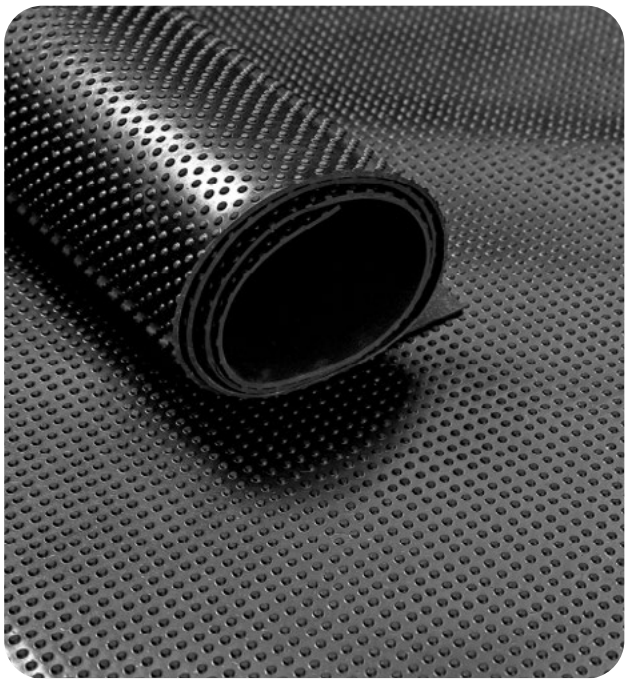

Rubber Matting

Mini Stud design

Quality	NR/SBR
Colour	Black
Stud diameter	3 mm
Temperature range	-20° to +90°C
Specific gravity	1,5 g/cm³
Hardness	80 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	250%
Features	Mini Stud design surface on one side and a fine cloth impression pattern on the other side.
Application	Indoor application such as airports, hotels, cabins, exhibitions et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.200	10.000	SMM 3/0



Rubber Matting

Checker design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Floormat with continues tear field design on one side and a fine cloth impression pattern on the other side.
Application	Car trunks, horse trailers, entrances, et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.000	10.000	CM 3/0
3	1.200	10.000	CM 3/0
3	1.400	10.000	CM 3/0
3	2.000	10.000	CM 3/0-2
5	1.400	10.000	CM 5/0
5	2.000	10.000	CM 5/0-2



Rubber Matting

Diamond design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Floormat with continues tear field design on one side and a fine cloth impression pattern on the other side.
Application	Car trunks, horse trailers, entrances, et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.500	10.000	DM 3/0



Rubber Matting

Hammerblow design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	75 Shore A +/- 5
Tensile strength	6 MPa
Elongation at break	250%
Features	Floormat with hammerblow design on one side and a fine cloth impression pattern on the other side.
Application	Car trunks, horse trailers, entrances, et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
6	1.650	10	HM 6/0
6	1.800	10	HM 6/0
6	2.000	10	HM 6/0
8	1.650	10	HM 8/0
8	1.800	10	HM 8/0
8	2.000	10	HM 8/0
10	1.800	10	HM 10/0
10	2.000	10	HM 10/0
10	2.500	10	HM 10/0-2,5



Rubber Matting

Ring Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,2 g/cm³
Hardness	50 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean hollow profile mat.
Application	Workplaces, walkways and entrances et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
22	400	600	RM 22/0-0,4x0,6
22	500	1.000	RM 22/0-0,5x1
22	750	1.000	RM 22/0-0,75x1
22	800	1.200	RM 22/0-0,8x1,2
22	1.000	1.000	RM 22/0-1x1
22	1.500	1.000	RM 22/0-1,5x1

F



Rubber Matting

Ring Mat on roll

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,2 g/cm³
Hardness	50 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean hollow profile mat.
Application	Workplaces, walkways and entrances et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
22	400	10.000	RMR 22/0-0,4
22	500	10.500	RMR 22/0-0,5
22	600	10.000	RMR 22/0-0,6
22	800	9.600	RMR 22/0-0,8
22	1.000	10.500	RMR 22/0-1
22	1.200	10.000	RMR 22/0-1,2
22	1.500	10.000	RMR 22/0-1,5



Rubber Matting

Heavy Duty Ring Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,2 g/cm³
Hardness	50 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean hollow profile mat.
Application	Workplaces, walkways and entrances et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
23	750	1.000	RMH 23/0-0,75x1
23	1.500	1.000	RMH 23/0-1,5x1



Rubber Matting

Heavy Duty Ring Mat on roll

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,2 g/cm³
Hardness	50 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean hollow profile mat.
Application	Workplaces, walkways and entrances et cetera.

F

Thickness (mm)	Width (mm)	Length (mm)	Article code
23	1.000	10.500	RMHR 23/0



Rubber Matting

Ring Mat on roll light

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,2 g/cm³
Hardness	50 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean hollow profile mat.
Application	Workplaces, walkways, entrances, pools et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
10	900	10.000	RMR 10/0-0,9
10	1.830	10.000	RMR 10/0-1,83



Rubber Matting

Entrance Ring Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,2 g/cm³
Hardness	50 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean hollow profile mat with sloping edge.
Application	Workplaces, restaurants, walkways, entrances et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
12	900	1.500	RME 12/0



Rubber Matting

Connective Ring Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,2 g/cm³
Hardness	50 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean hollow profile mat with sloping edge.
Application	Workplaces, restaurants, walkways, entrances, et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
14	900	900	RMS 14/0



Rubber Matting

Stable Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	55 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean anti-slip hammerblow profile mat with on the bottom groves for effective drainage.
Application	Flooring for stables and shelters.

F

Thickness (mm)	Width (mm)	Length (mm)	Article code
17	1.220	1.830	SBM 17/0
17	900	1.200	SBMS 17/0



Rubber Matting

Cow Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	55 Shore A +/- 5
Tensile strength	3 Mpa
Elongation at break	200%
Features	Anti-slip and easy to clean interlocking diamond profile mat with with a damping construction for more comfort.
Application	Stable flooring.

Thickness (mm)	Width (mm)	Length (mtm	Article code
23	1.830	1.220	SBC 23/0



Rubber Matting

Trailer Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A +/- 5
Tensile strength	3 Mpa
Elongation at break	200%
Features	Easy to clean and anti-slip.
Application	Improve trailer access and comfort for horses.

Thickness (mm)	Width (mm)	Length (mm)	Article code
17	1.550	1.750	LM 17/0
27	1.200	2.400	TM 27/0



Rubber Matting

Workplace Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +50°C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A +/- 5
Tensile strength	3 Mpa
Elongation at break	200%
Features	anti-fatigue mat with a distinctive bubbled surface.
Application	reducing fatigue, increasing productivity and promoting a safer work environment.

Thickness (mm)	Width (mm)	Length (mm)	Article code
15	600	900	WP 15/0-0,6x0,9
15	900	1.200	WP 15/0-0,9x1,2
15	900	1.500	WP 15/0-0,9x1,5



Rubber Matting

Workplace Mat on roll

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +50°C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A +/- 5
Tensile strength	3 Mpa
Elongation at break	200%
Features	anti-fatigue mat with a distinctive bubbled surface.
Application	reducing fatigue, increasing productivity and promoting a safer work environment.

Thickness (mm)	Width (mm)	Length (mm)	Article code
15	900	10.000	WPR 15/0

F



Rubber Matting

Workplace Mat with yellow border

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +50°C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A +/- 5
Tensile strength	3 Mpa
Elongation at break	200%
Features	Anti-fatigue mat with a distinctive bubbled surface.
Application	Reducing fatigue, increasing productivity, and promoting a safer work environment.

Thickness (mm)	Width (mm)	Length (mm)	Article code
15	900	1.200	WPY 15/0-0,9x1,2
15	600	900	WPY 15/0-0,6x0,9



Rubber Matting

Workplace Mat with yellow border on roll

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +50°C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A +/- 5
Tensile strength	3 Mpa
Elongation at break	200%
Features	Anti-fatigue mat with a distinctive bubbled surface.
Application	Reducing fatigue, increasing productivity, and promoting a safer work environment.

Thickness (mm)	Width (mm)	Length (mm)	Article code
15	910	10.000	WPYR 15/0

Custom-made solutions


Digital CNC-cutting





High-performance multi-blade slitter



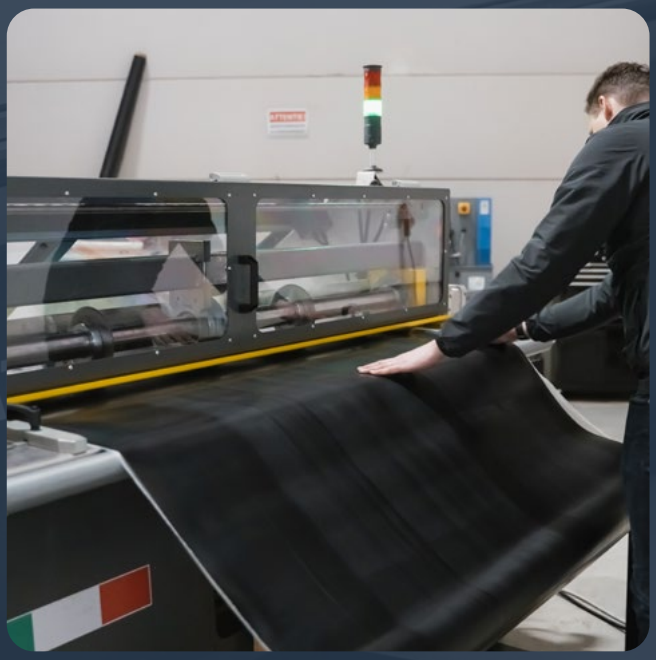

Rubberselect
Utrechtsestraatweg 230
3911 TX Rhenen
The Netherlands

T +31 (0)88 61 89 340
info@rubberselect.com
www.rubberselect.com

More flexible solutions on **Rubberselect.com**